


4LST+4M

POMPA ASSEMBLATA CON 30M DI CAVO *ASSEMBLED PUMP WITH 30M CABLE*

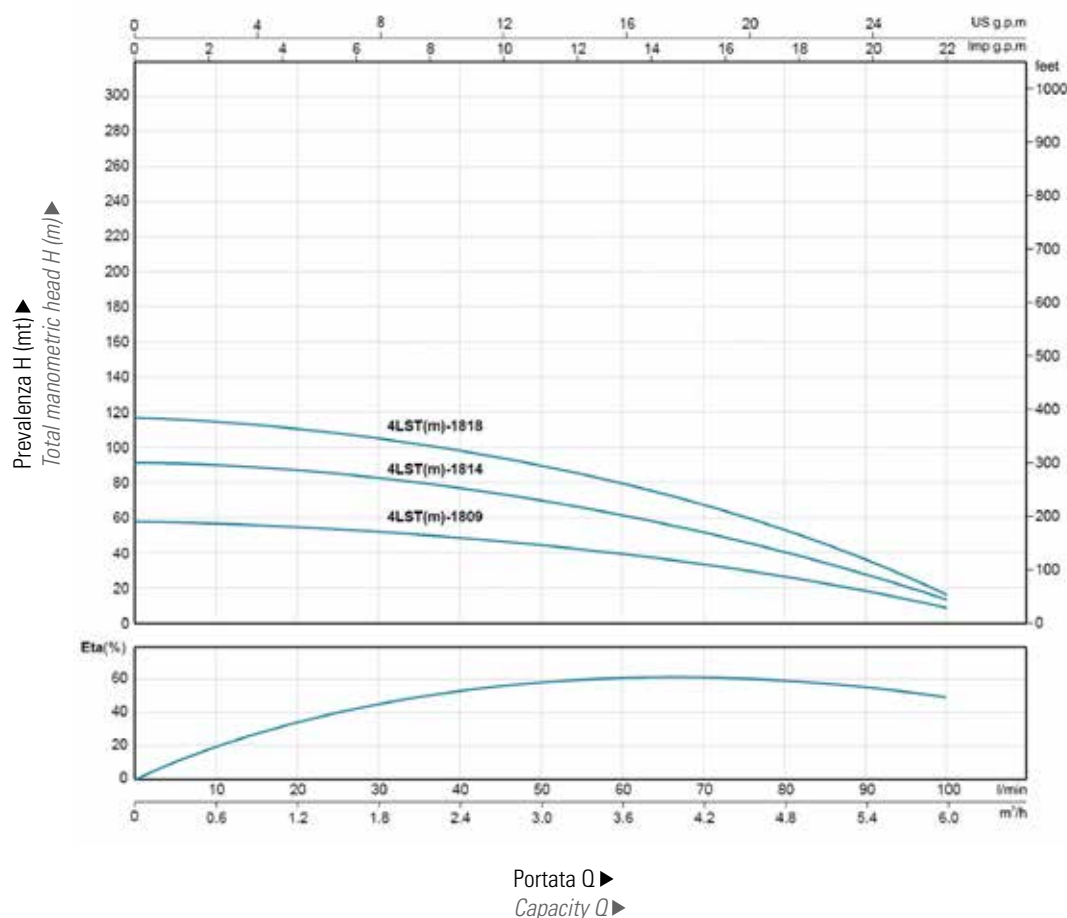

DATI TECNICI | TECHNICAL DATA

Modello <i>Model</i>	Potenza <i>Power</i>		Qm³/h	0	1.5	1.8	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	Codice <i>Code</i>	€ cad € each
	kW	HP		0	25	30	40	45	50	60	70	80	90	100		
Monofase <i>Single Phase</i>																
4LSTm-1809	0.75	1.0	H (mt)	58	53	52	49	46	45	40	34	26	17	8	104LSTM1809C	522,00
4LSTm-1814	1.1	1.5		91	83	82	77	72	70	63	53	41	27	12	104LSTM1814C	587,00
4LSTm-1818	1.5	2.0		117	107	104	98	93	89	80	67	54	35	15	104LSTM1818C	682,00
Trifase <i>Three Phase</i>																
	Potenza <i>Power</i>		Qm³/h	0	1.5	1.8	2.4	2.7	3.0	3.6	4.2	4.8	5.4	6.0	Codice <i>Code</i>	€ cad € each
	kW	HP	QL/min	0	25	30	40	45	50	60	70	80	90	100		
4LST-1809	0.75	1.0	H (mt)	58	53	52	49	46	45	40	34	26	17	8	104LST1809C	518,00
4LST-1814	1.1	1.5		91	83	82	77	72	70	63	53	41	27	12	104LST1814C	581,00
4LST-1818	1.5	2.0		117	107	104	98	93	89	80	67	54	35	15	104LST1818C	677,00

Per le versioni monofase il quadro con condensatore è da ordinare a parte (pag. 204-205)

For the single-phase versions the control panel with capacitor can be ordered separately (pag. 204-205)

ELETTROPOMPE SOMMERSE SUBMERSIBLE PUMPS

5DWM/P

ELETTROPOMPE SOMMERSE 5" CON GIRANTE E DIFFUSORE IN TECNOPOLIMERO SUBMERSIBLE BOREHOLE PUMPS

APPLICAZIONE

Queste elettropompe sono consigliate per pompare acqua pulita completamente priva di sabbia. Possono pescare da fiumi, pozzi o serbatoi di raccolta, sono adatte per utilizzo domestico civile e agricolo per la distribuzione dell' acqua, per l'irrigazione di orti e giardini.

UTILIZZO

- Temperatura massima del liquido: +35°C
- **Max profondità di immersione: 20m**
- Minimo diam. pozzo: 132 mm
- Diam. uscite: 1"1/4

MOTORE

- Motore riavvolgibile
- Monofase: 230V-240V/50Hz
- Cavo: 15 m
- Classe di isolamento: F
- Classe di protezione: IP68

APPLICATION

- For water supply from wells or reservoirs.
- For domestic use, for civil and industrial applications.
- For garden use and irrigation.

OPERATING CONDITIONS


- Maximum fluid temperature up to +35°C
- Maximum immersion: 20 m
- Minimum well diameter: 132 mm
- Diameter outlet: 1"1/4

MOTOR AND PUMP


- Rewindable motor
- Single-phase: 220V-240V/50Hz
- Cable length: 15 m
- Insulation class: F
- Protection class: IP68



CODICI IDENTIFICATIVI

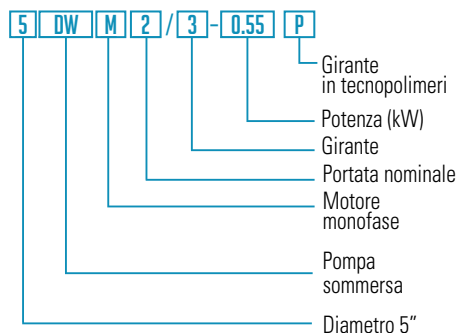

IDENTIFICATION CODES

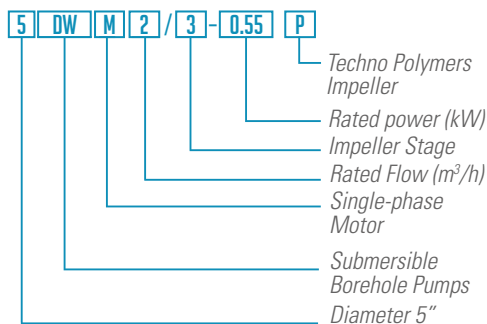

DATI TECNICI | TECHNICAL DATA

n ≈ 2850 l/min

Modello Model	Potenza Power		Ampere	Q	m³/h	0	1	1.5	2	2.5	3	3.5	4	4.5	5	Codice Code	€ cad € each
Monofase Single Phase	kW	HP		Q	L/min	0	16.6	25	33.3	41.6	50	58.3	66.6	75	83.2		
5DWm2/3P	0.55	0.75	3.50	H (mt)		38	35	33	31	28.5	25	20.5	16.5	12	7	105DWm23P	437,00
5DWm2/4P	0.6	0.8	4.40			49	46	43.5	40	37	32.5	27.5	22	16	10	105DWm24P	462,00
5DWm2/5P	0.75	1	5.00			60	56	52.5	48.5	44	39	33	26	19	11	105DWm25P	508,00
5DWm2/6P	0.9	1.2	6.00			73	68	64	60	54	48	40.5	32	23	14.5	105DWm26P	543,00