


FAN

**FS 75**



## FUNCTIONING PRINCIPLES

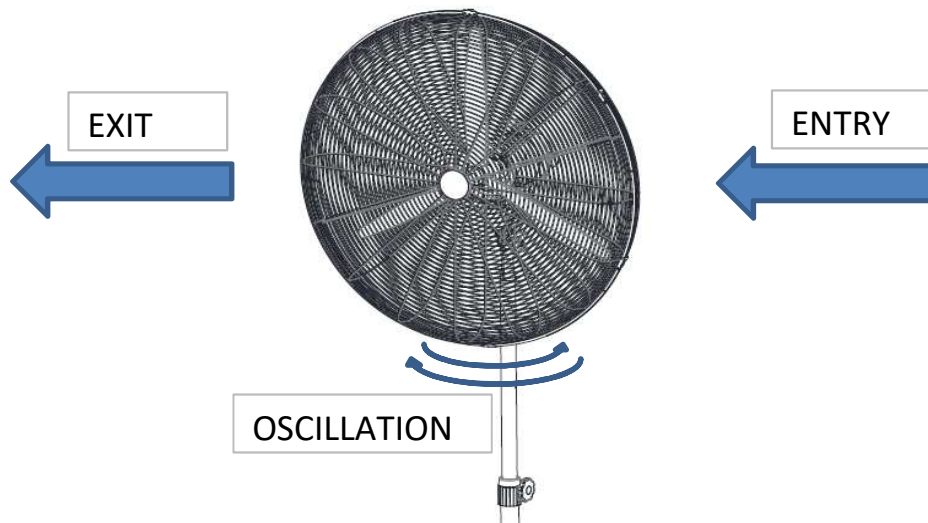

The air flow is forced axial fan. Air is sucked in the rear and outlet takes place in front of the machine. The fan's head can swings.

## TECHNICAL DATA

Max capacity	kW	<b>0,121</b>	Power supply	V	<b>220-240</b>
	Kcal/h		Frequency	Hz	<b>50</b>
	Btu/h		Rated current	A	<b>0,52</b>
Combustible		/			
Net weight	kg	<b>21</b>			
Gross weight	kg	<b>24</b>			
Noisy level	dBa	<b>80</b>			
Air displacement	m <sup>3</sup> /h	<b>13140</b>			

## PACKING

Dimensions packing	mm	<b>835 x 195 x 1060</b>
Dimensions utilization	mm	<b>Ø800 x CROSS BASE 700 x H max1650 - H min 1450</b>
Pieces for Euro-pallet	n°	<b>10</b>
Pieces per truck 80m <sup>3</sup>	n°	<b>330</b>

## COMPONENTS

Motor

Asynchronous monophase 1400 rpm

Diameter fan

mm

750 (30 inch)

## ACCESSORIES

## WIRING DIAGRAM

