




PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	(mm)	(mm)	(mm)	(kg)	(mm)	(mm)	(mm)	(kg)
SK 12 C	367	180	280	5	392	277	217	6
SK 40 C	505	277	511	13	542	387	315	14
SK 60 C	575	277	511	15	610	387	315	16
SK 88 C	700	317	538	21	732	432	350	22
SK 120 C	795	540	706	38	845	595	670	45

		SK 12 C	SK 40 C	SK 60 C	SK 88 C	SK 120 C
codice - code		06SK101	06SK102	06SK103	06SK104	06SK105
potenza term. nominale 2° stadio rated heat power 2nd stage	Hs [kW] (kW/kcal/h-BTU/h)	3 2.580 - 10.235	10 8.600 - 34.120	15 12.900 - 51.185	22 18.915 - 75.065	30 25.818 - 102.455
potenza term. nominale 1° stadio rated heat power 1st stage	Hs [kW] (kW-kcal/h -	1,5 1.290 - 5.185	6,6 5.675 - 22.520	10 8.600 - 34.120	15 12.900 -	20 17.212 - 68.304
rendimento - heat efficiency	(%)	100	100	100	100	100
portata aria - air flow	(m³/h)	450	1.500	2.000	3.050	3.900
salto termico - temperature rise	a 20°C (°C)	44,5 - 32	48,3 - 30,5	54,3 - 35	56 - 38	56 - 38
corrente massima - current max	(A)	13 - 6,5	13,6 - 7,1	21 - 13,8	30 - 21	43 - 28
alimentazione elettrica - electrical	(V - ph - Hz)	230 - 1 - 50	400 - 3 - 50	400 - 3 - 50	400 - 3 - 50	400 - 3 - 50/60
connessioni - connection		-	3P+⬇ 3P+⬇+N	3P+⬇ 3P+⬇+N	3P+⬇ 3P+⬇+N	3P+⬇+N
quantità per pallet - pallet quantities	(pz - pcs)	72	36	24	18	6

Possibilità di impilamento (SK 40-60-88-120)
Possibility to stack-ability (SK 40-60-88-120)



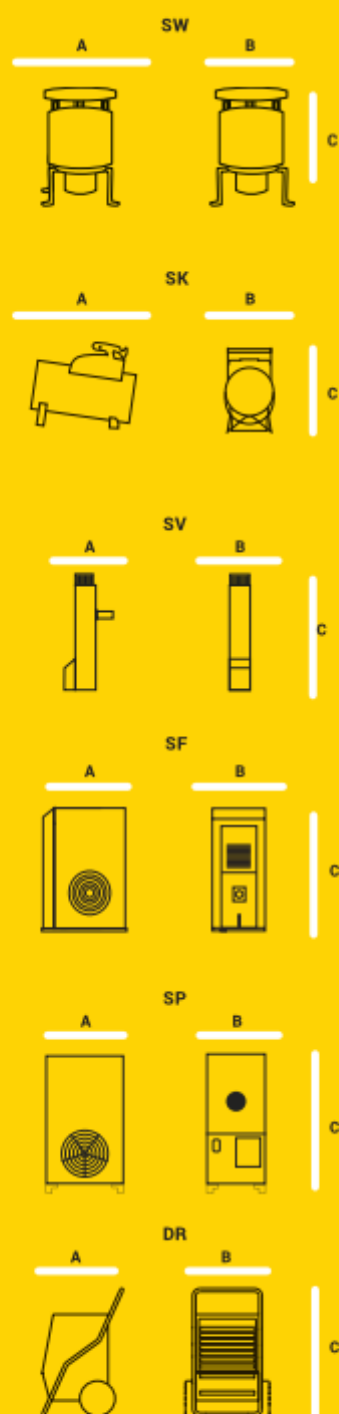

MACCHINA - MACHINE				IMBALLO - PACKAGING				PALLET - PALLET					
MOD	A	B	C	Netto/ Net	X	Y	H	Lordo/ Gross	n°	X	Y	H	Lordo Gross
	(mm)	(mm)	(mm)	(kg)	(mm)	(mm)	(mm)	(kg)		(mm)	(mm)	(mm)	(kg)
SG 340M-A	700	317	538	16	732	432	350	19,8	18	1.200	860	2.260	381,2
SG 420M-A	835	438	606	26	845	460	470	29,4	12	1.300	1000	2.000	366,4
SW 128	528	528	676	17	450	450	700	18	12	1.000	1.000	2.220	225
SK12C	367	180	280	5	392	277	217	6	72	1.200	800	2.111	447
SK 40 C	505	277	511	13	542	387	315	14	36	1.200	1.084	2.056	533
SK 60 C	575	277	511	15	610	387	315	16	24	1.200	800	2.056	404,3
SK 88 C	700	317	538	21	732	432	350	22	18	1.200	864	2.200	411
SK 120 C	795	540	706	38	845	595	670	45	6	1.200	850	2.150	280
SV 72	553	370	1.996	70	2.050	420	710	88,5	-	-	-	-	-
SF 140	1.010	530	1.360	141	1.055	580	1.510	161	-	-	-	-	-
SF 280	1.045	600	1.530	184	1.120	650	1.680	204	-	-	-	-	-
SF 400	1.400	640	1.650	259	1.465	690	1.800	279					
SP 140	724	511	1.308	102	1.270	785	660	122	-	-	-	-	-
SP 280	791	581	1.478	141	1.420	800	730	161	-	-	-	-	-
SP 440	1.092	646	1.678	225	1.150	700	1.750	255	-	-	-	-	-
SP 940	1.450	911	2.120	370	1.500	980	2.215	400	-	-	-	-	-
DR 120	540	585	775	39	505	475	615	42	-	-	-	-	-
DR 190	650	615	958	49	660	575	900	56,5	-	-	-	-	-
DR 250	640	615	958	52	660	575	1.000	62,5	-	-	-	-	-
DR 310	761	776	1.048	76	785	735	1.085	86,5	-	-	-	-	-